

PROJECT:		
ITEM #		QTY:
MODEL #		
AIA #	SIS #	

PP-20


DOOR TYPE POT, PAN AND UTENSIL WASHER



Rendered image is for general visual representation only. Please refer to specifications for the latest detailed product information.

STANDARD FEATURES

- · Heavy-Duty Stainless Steel Construction
- Front-Loading
- External Rinse Hose And Spray Gun
- · Self-Contained Water Heating
- Moisture Resistant Control Gauges
- · Recirculating Wash Water
- · Adjustable Wash And Rinse Cycles
- · Removable Dual Filtration System
- · Digital Control And Information Center
- · Versatile Racking System
- · Electric Or Steam Heating
- · Precision Engineered Spray Patterns









SPECIFIER STATEMENT

Specified unit will be Champion Industries model PP-20 pot, pan and utensil washer. Features include split door design, 7.5 Hp pump motor, 2 pan capacity, push button control and information center, recirculating wash water and 27 second wash/rinse cycle.

1 year parts and labor warranty.

In the USA:

3765 Champion Blvd, Winston-Salem, NC 27105 Tel: (336) 661-1556 Fax: (336) 661-1979 www.championindustries.com In Canada:

2674 N. Service Rd., Jordan Station, Ontario, Canada LORISO Tel: (905) 562-4195 Fax: (905) 562-4618 www.championindustries.com/lcanada

Rev. 09/2025 Printed in U.S.A.

APPROVAL: _

__ DATE: _____



PP-20

DOOR TYPE POT, PAN AND UTENSIL WASHER SPECIFICATIONS

Dimensions shown in inches

SPECIFICATIONS

Machine Construction

12, 14, & 16 gauge stainless steel. All seams tig welded.

Split Door

Stainless steel split door design. The top half rises while the lower half folds down to provide a space saving drain table.

Lift Door (optional)

Stainless steel front loading lift door design for easy loading and unloading.

Spray Arm Assembly

Stainless steel spray arm assemblies, with stainless steel jets and quick-release mechanism for easy cleaning and reassembly.

Filter

Perforated, removable, stainless steel basket.

Water Pump

7.5 Hp, 208/240 or 480 volt, 1 phase or 3 phase, 60 cycle with output of 120 gallons per minute at 35 to 45 P.S.I.

Digital Control & Information Center

110 volt control circuit with push pad operation of "power on," "stop" and "short, medium or long wash cycles." A digital display indicates "time remaining" for each cycle. LED's indicate wash, rinse and unload functions. A buzzer is also included to provide an audible indication of time to unload. Pre-programmed circuit board allows the push pad to be used as a "diagnostic center" by displaying "error codes" for ease of troubleshooting.

Gauges

Special moisture resistant design measures wash temperature, rinse temperature, wash jet pressure.

Wash Tank


Stainless steel with electric infrared, gas, steam or steam coil natural immersion heaters, thermostatically controlled, low-water protected, sloped to drain with a 36-gallon capacity (27 gallons if infrared gas heated)


Rinse Tank

Stainless steel 12 kW total 208/240 or 480 volt or optional 575 electric booster heaters to provide 180°F/190°F hot sanitizing rinse.

Racks

Stainless steel rod, built to match specific washing requirements.

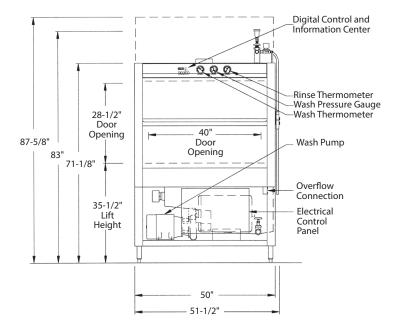





Recirculating Wash Tank

PP-20

DOOR TYPE POT, PAN AND UTENSIL WASHER SPECIFICATIONS

WasherAutomatic washing machine designed to wash all pots, pans and utensils commonly used in baking and cooking operations.

Cabinet Split Door: 50" wide x 36" deep x 71–1/8" high. Overall height with door open: 86–1/8".

Door opening: 40" wide x 28-1/2" high. Constructed of 16 gauge, stainless steel. All seams

continuously welded, cleaned and polished.

Lift Door: 50" wide x 36" deep x 73" high. Overall height with door open: 100-3/4". Door opening: 40" wide x 28-1/2" high. Constructed of 12, 14 & 16 gauge, stainless steel. All seams

tig-welded, cleaned and polished.

Door Split Door: Front-loading, split door design for easy loading and unloading. The top half of the door system rises while the lower half folds down to create a space saving drain table.

Door is interlocked with limit switch to prevent machine operation while door is open.

Door construction: 14 and 18 gauge, stainless steel.

Lift Door: Counter balanced with self-lubricating guides, stainless steel cables on nylon rollers with cable guards to insure tracking. Door is interlocked with proximity switch to

prevent machine operation while door is open. Door construction: 16 gauge, stainless steel.

Heated by 12 kW total 208/240, 480 or optional 575 volt electric immersion heater, thermostatically controlled wash temperature and low water protection system. 36 gallons (27 gallons if infrared heated), 14 gauge stainless steel, sloped to drain. Infrared gas and

steam heating options available.

Wash Tank Filter Perforated, stainless steel basket type, double filter system for increased effectiveness and

easy cleaning without emptying wash tank.

Wash Tank Fill Valve Split Door: Size 1-1/4" NPT, automatic.

Lift Door: Size 1/2" brass material, solenoid type, automatic.

Wash Tank Drain Valve Size 1-1/4" brass material, gate type for manual or electrically operated ball valve for automatic

option

Wash Pump 7.5 hp, 208/240, 480 or optional 575 volt, 3 phase, 60 cycle. Close coupled; 120 gallons per

minute at 35 to 45 psi, mounted on 12 gauge stainless steel formed channel base.

Spray Arm Assemblies Water driven, stainless steel spray arm assemblies, top and bottom, with stainless steel jets

and quick-release mechanism for easy cleaning and reassembly.

Sanitizing Rinse Tank

Stainless steel, 10 gallon capacity, with 12 kW total 208/240, 480 or optional 575 volt

electric booster heater to provide 180°/190° F hot sanitizing rinse. Uses 5 gallons per 27

second cycle. Infrared gas and steam coil heating options available.

Rinse Supply Valve Size 3/4" brass material, solenoid type, automatic.

Final Rinse Stainless steel tubing with brass compression fittings and brass or optional stainless steel

full cone rinse jets.

Control & 120 volt control circuit with push pad operation of "Power On," "Stop" and "Short, Medium or Long Wash Cycles." A digital display indicates "Time Remaining" for each cycle. LED's

indicated wash, rinse and unload functions. A buzzer is also included to provide an audible indication when the machine is ready to unload. A pre-programmed circuit board allows the push pad to be used as a "Diagnostic Center" by displaying "Error Codes" for ease of troubleshooting. Moisture resistant gauges measure Wash Temperature, Wash Pressure and

Rinse Temperature.

Wash Down Spray Hose Externally mounted spray hose with spray gun for easy cleaning and maintenance of

machine.



PP-20

DOOR TYPE POT, PAN AND UTENSIL WASHER SPECIFICATIONS

Steam Exhaust Vent Steam exhaust vent 6-3/4" I.D., consisting of 16 gauge rolled collar for PVC pipe connection

bolted to the top of the machine. Machine pre-wired with control timer for the addition of

a fan.

cycle. 300 CFM @ .05" static pressure. 1/10 Hp, 110 volt motor, 1550 RPM.

Racks Standard bakery racks include (1) utensil rack with (2) hold-down lids and (2) bun/sheet pan

inserts designed to hold (20) pans, constructed of stainless steel rod, mig-welded.

Connections Water Inlet: 120°F, 3/4" NPT

Water Drain and Overflow: 1-1/4" NPT Electrical: Single point connection Steam Heating Option: 1/2" NPT

Weight Crated: 1,100 lbs. Uncrated: 850 lbs. NOTE: All weights are approximate. Weights will vary

depending on the number of options included with the machine.

Electrical Connections

575 voltage available in Canada

	Running Amps	
Elec. Specs	Electric Wash Electric Booster	Steam Wash* Steam Booster
208/60/3	88	21
240/60/3	81	20
480/60/3	42	11
575/60/3	35	11

*Steam Supply: Consumption: 95 lbs./hr. @ 15 psi minimum

Certifications NSF, UL and UL Sanitation Listed (all). CUL Listed

Warning Plumbing and electrical connections should be made by qualified personnel who will observe all

the applicable plumbing, sanitary, and safety codes and the National Electrical Code.

Note Water Hammer Arrestor (meeting ASSE-1010 standard or equivalent) to be supplied (by others) in

common water supply line at service connection.

Plumbing Notes Because of the variation in house-supplied steam and water pressures, steam and water pressure

regulating valves (PRVs) may be needed. (Water PRV is standard on machines with booster.) The PRVs can either be purchased from Champion or obtained locally. Champion does not endorse using on-demand (tankless) water heating systems, as well as PEX and other plumbing materials that may limit water flow, as these could impair machine performance. For optimal results, we recommend using appropriately sized conventional hot water tanks and standard copper water supply

lines that adhere to our specifications. Not following these recommendations may void the manufacturer's warranty. Water hardness of 3 grains/US Gal (0.83 Imp Gal) – 5.3 Mg/L or less

In the USA: 3765 Champion Blvd, Winston-Salem, NC 27105 | Tel: (336) 661-1556 Fax: (336) 661-1979 | www.championindustries.com

In Canada: 2674 N. Service Rd., Jordan Station, Ontario, Canada LORISO | Tel: (905) 562-4195 Fax: (905) 562-4618 | www.championindustries.com/lcanada

Rev. 09/2025 Printed in U.S.A.

Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.

