

The Dishwashing Machine Specialists

PROJECT:		
ITEM #		QTY:
MODEL #		
AIA #	SIS #	

## 86 PRO-FF Electric

## HIGH TEMPERATURE 2-TANK ELECTRIC RACK CONVEYOR



Rendered image is for general visual representation only. Please refer to specifications for the latest detailed product information.

#### STANDARD FEATURES

- 64" Single Tank + 22" Prewash, Frontfeed
- Perpetual Rack Advance System with digital jam monitoring, and mechanical drive protection
- Automated Delime Function with user-customizable alert intervals
- · 348 Racks Per Hour
- .28 Gallons/Rack With Energy Sentinel (idle pump shut-off)
- Advanced Touchscreen Display
   intuitive condition alerts, with user friendly cleaning and
   operation visual guidance, multi-lingual
- Enhanced Visual On-board Diagnostics quickly identify machine faults for rapid resolution and less downtime
- · Automatic Tank Fill
- Programmable Machine Dwell
  pauses rack in wash zone for extended cleaning, NSF Certified
  Pot & Pan Mode
- · Automatic Drain Valve
- · Single-Piece Hood Design
- Single-Piece Scrap Screen more robust and faster cleaning
- Single-Piece Stainless Steel Upper And Lower Wash Arm Manifolds
- 20" Standard Vertical Clearance accommodates 18" x 26" sheet pans
- Fully Insulated Doors
  open a full 180° for unrestricted cleaning access
- All Stainless Steel Heavy Gauge Construction including base, legs and feet
- Enclosure Panels (front and sides)
- 2 HP Pump Motor with stainless steel impeller
- · Factory Authorized Start-Up
- Vent Fan Control
- ENERGY STAR® Certified









#### SPECIFIER STATEMENT

Specified unit will be Champion model 86 PRO-FF Series 2-tank high temperature rack conveyor dishwashing machine. Features top mounted prodigy HMI user interface controls with proactive maintenance software, proportional rinse, using only 100 GPH, optional built-in 21kW booster, progressive anti-jam drive system, energy sentinel (idle pump shut-off), 348 racks per hour, single-piece hood design, single-piece stainless steel upper & lower wash arms manifolds, full 180° opening leak proof insulated hinged access doors.

#### 1 Year parts and labor warranty.

#### In the USA:

3765 Champion Blvd, Winston–Salem, NC 27105 Tel: (336) 661–1556 Fax: (336) 661–1979 www.championindustries.com

#### In Canada:

2674 N. Service Rd., Jordan Station, Ontario, Canada LORISO Tel: (905) 562-4195 Fax: (905) 562-4618 www.championindustries.com/lcanada

ev. 09/2025	Printed in U.S.A.	APPROVAI:	TAC	Œ.	



# 86 PRO-FF Electric

HIGH TEMPERATURE 2-TANK ELECTRIC RACK CONVEYOR

#### **ACCESSORIES**

- □ Drain water tempering kit (unmounted)
- ☐ Table limit switch, unmounted (recommended on all rack conveyor installations) (unmounted)
  - o WHISKER STYLE
  - o BUTTON STYLE
- Vent cowl, stainless steel with 7" stacks & locking dampers
- ☐ Extended vent cowl, with 7" stacks, locking dampers & external curtain (unload end only)
- □ Flanged feet (unmounted)
- □ Water hammer kit (unmounted)
- Chemical pump kit (detergent and rinse aid, mounted and interwired)
- Water pressure regulating valve (unmounted; standard with booster)
- □ ION scale prevention device (unmounted)
- Water softening system (manufactured, warrantied and serviced by Kinetico)
- ☐ Dish racks:
  - o PEG RACK
  - o FLAT RACK
  - o SHEET PAN RACK
- ☐ Splash shields (unload end only)
- ☐ Model PRO-90B unloader (90° corner conveyor table)
- ☐ Model RCT 64 or RCT 84 roller conveyor table (see factory for custom length)
- □ Stainless steel rear enclosure panels
- □ Correctional package (contact factory)

#### **OPTIONS**

- 33" Blower dryer electric
- Booster heaters (completely interplumbed, controls are interwired)
  - o 40°F RISE (BUILT-IN) (FIELD CONVERTED)
  - o 70°F RISE (BUILT-IN)
- □ Direct link connectivity solution
- ☐ Direct link plus+ connectivity solution

#### PRO-90B

90° Corner Conveyor table unloader available





Roller conveyor table



# 86 PRO-FF Electric

HIGH TEMPERATURE 2-TANK ELECTRIC RACK CONVEYOR

#### **UTILITIES**

1	Electrical Connections				
	A Machine electrical connection				
	B Booster electrical connection				
2	Hot Water				
	25 PSI flowing pressure (machine with built-in booster) Main connection 3/4" NPT, 110° incoming water (Initial Fill = 42 Gal)				
4	Hot Water				
	20 PSI flowing pressure (machine with no booster) Main water connection 3/4" NPT, 180° incoming water (Initial Fill = 42 Gal)				
5A	Drain				
	Connection 1-1/4" NPT				
	Drain Max Flow Rate (g/min) 15				
8	Vents				
	A Stack connection – load end 150 CFM @ 1/4" static pressure				
	B Stack connection – unload end 400 CFM @ 1/4" static pressure				
Warnir	Warning: Plumbing and electrical connections should be made by qualified personnel				

who will observe all the applicable plumbing, sanitary, and safety codes and the National Electrical Code.

**Note:** Water Hammer Arrestor (meeting ASSE-1010 standard or equivalent) to be supplied (by others) in common water supply line at service connection.

Plumbing Notes: Because of the variation in house-supplied steam and water pressures, steam and water pressure regulating valves (PRVs) may be needed (Water PRV is standard on machines with booster.) The PRVs can either be purchased from Champion or obtained locally.

Champion does not endorse using on-demand (tankless) water heating systems, as well as PEX and other plumbing materials that may limit water flow, as these could impair machine performance. For optimal results, we recommend using appropriately sized conventional hot water tanks and standard copper water supply lines that adhere to our specifications. Not following these recommendations may void the manufacturer's warranty.

Water hardness of 3 grains/US Gal (0.83 Imp Gal) - 5.3 Mg/L or less

Venting Notes: Fabricated duct size: 3-7/8" x 15-7/8" (outside dimensions)

Optional Drain Tempering: 1/2" NPT cold water connection required. 1/2" NPT drain connection from back flow preventer to house drain. (FIELD INSTALLED and PLUMBED).

#### **SPECIFICATIONS**

Conneity	
Capacity	2.40
Racks per hr (NSF rated)	348
Wash tank (US gal.)	17
Power rinse tank (US gal.) Prewash tank (US gal.)	17 8
	9.6
Conveyor speed (ft/min)  Conveyor speed Pot/Pan Mode (ft/min)	9.0
(only one rack at a time in pot/pan)	4.6
Motor Horsepower	
Drive	1/6
Prewash	2
Wash	2
Power Rinse	2
Water Consumption	
US Gal. per hr (max. use)	100
US Gal. per rack	.28
Heating	
Tank Heat, electric (kW)	15
Power rinse, elctric (kW)	10
Electric booster (built-in) (kW supplied for 40°F rise)	12
Electric booster (built-in) (kW supplied for 70°F rise)	21
Booster heaters completely inter plumbed, controls are inte	
Venting	
Load end (minimum CFM)	150
Unload end (minimum CFM)	400
Standard 20"x 20" Rack Complement	
Peg	1
Flat	1

### Two Tank PRO Rack Machine and Booster Ratings

The tables below give the ratings for each model. The ratings include the requirements of the 12 and 21 kW booster heaters when they are in use.

#### Machines with a Dual point electrical connection:

86 PRO-FF Electric Tank Heat, 21 kW Booster Only			
Elec. Specs	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	59	80	80
240/60/3	51	70	70
480/60/3	26	35	35
575/60/3	22	30	30

86 PRO-FF Electric Tank Heat, 12 kW Booster Only				
Elec. Specs	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device	
208/60/3	34	45	45	
240/60/3	29	40	40	
480/60/3	15	20	20	
575/60/3	12	15	15	

86 PRO-FF Electric Tank Heat, No booster			
Elec. Specs	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/3	98	125	125
240/60/3	85	110	110
480/60/3	42	60	60
575/60/3	33	45	45

#### Machines with a Single point electrical connection:

86 PRO-FF Electric Tank Heat, 21 kW 70°F Booster			
Elec. Specs	Rated Amps	Maximum Overcurrent Protective Device	
208/60/3	Call factory for this special engineering option		
240/60/3	136	175	175
480/60/3	68	90	90
575/60/3	55	70	70

86 PRO-FF Electric Tank Heat, 12 kW 40°F Booster				
Elec. Specs	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device	
208/60/3	132	175	175	
240/60/3	114	150	150	
480/60/3	57	80	80	
575/60/3	45	60	60	

#### Note:

Machine ships as a dual point electrical connection standard. Easily converted to a single point connection by a qualified electrician (except as shown in above tables).

In the USA: 3765 Champion Blvd, Winston-Salem, NC 27105 | Tel: (336) 661-1556 Fax: (336) 661-1979 | www.championindustries.com

In Canada: 2674 N. Service Rd., Jordan Station, Ontario, Canada LORISO | Tel: (905) 562-4195 Fax: (905) 562-4618 | www.championindustries.com/lcanada




# 86 PRO-FF Electric

HIGH TEMPERATURE 2-TANK ELECTRIC RACK CONVEYOR


Shipping weight crated: 1,200 lbs. Dimensions shown in inches

## Front View: Left to Right Model L-R



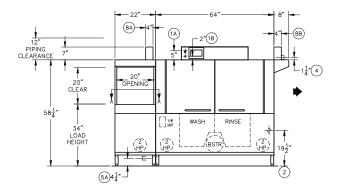


# Front View: Right to Left Model

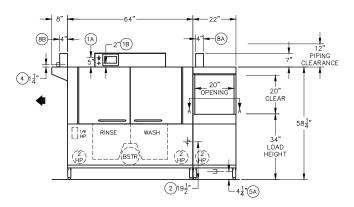


## Plan View: Left to Right Model



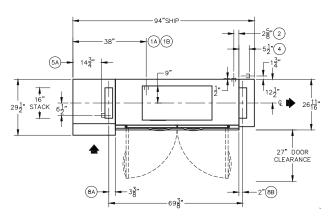



### Plan View: Right to Left Model R-L



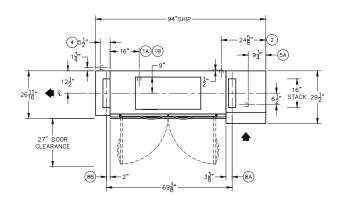

#### **End View**







Suggested Table Construction

Flange Details

In the USA: 3765 Champion Blvd, Winston-Salem, NC 27105 | Tel: (336) 661-1556 Fax: (336) 661-1979 | www.championindustries.com

In Canada: 2674 N. Service Rd., Jordan Station, Ontario, Canada LORISO | Tel: (905) 562-4195 Fax: (905) 562-4618 | www.championindustries.com/lcanada

Rev. 09/2025 Printed in U.S.A.

Due to an ongoing value analysis program at Champion, specifications contained in this catalog are subject to change without notice.

